

PELADOW™ Calcium Chloride Pellets



The Premier Snow and Ice Melter

Application

PELADOW™ Calcium Chloride Pellets are the premier snow and ice melter, ideal for clearing sidewalks, driveways and parking lots. It melts ice up to 3 times faster than competing materials, and outperforms other products across a wide range of temperatures. The round shape of PELADOW™ helps it penetrate ice and break the bond with the pavement more quickly than flat or crystal-shaped ice melters, allowing easy removal of ice and snow.

Description

PELADOW™ is a purified inorganic salt produced by removing water from a naturally occurring brine solution. Unlike other processes used to produce calcium chloride, the brine process does not involve reactions with chemicals such as hydrochloric acid or ammonia. The National Organic Standards Board noted this distinction when it classified the brine process as “non-synthetic.”

PELADOW™ meets or exceeds ASTM D98 and AASHTO M144 requirements for calcium chloride purity. ASTM classification for PELADOW™ is Type S, Grade 2, Class B.

Properties

| Characteristic | Typical Value ⁽¹⁾ |
|---|------------------------------|
| Calcium chloride assay | >90% |
| Pellet size distribution | |
| Larger than 4.8 mm | <20% |
| From 0.6 to 4.8 mm | >76% |
| Smaller than 0.6 mm | <4% |
| Bulk density ⁽²⁾ | 58-66 lb/ft ³ |
| ASTM D98 purity requirements ⁽³⁾ | |
| Total alkali chlorides (as NaCl) | <6% |
| Total magnesium (as MgCl ₂) | >0.5% |
| Calcium hydroxide | >0.2% |

(1) All percentages are by weight.

(2) Bulk density is a specification item for bulk shipments only.

(3) On an active ingredient basis.

Storage

Solid calcium chloride is both hygroscopic and deliquescent. This means that the product can absorb moisture from the air, even to the point of converting to liquid brine. For this reason, solid calcium chloride should be protected from excessive exposure to moisture to maintain product quality while in storage. Store in a dry area. Opened packages should be tightly resealed after each use.

For full safety and handling details, refer to the current Material Safety Data Sheet for this product, available at www.oxycalciumchloride.com.


Availability

PELADOW™ is available in various package sizes, and in bulk truck and bulk rail quantities.

Making Calcium Chloride Solutions From PELADOW™

PELADOW™ is the ideal choice for making anti-icing solutions to fight black ice or frost. Mix 20 lbs (2.4 gal) of pellets in enough cold water to make 5 gallons of solution. Stir continuously for 2-3 minutes or until completely dissolved. Use caution as the solution will get hot. Refer to the Material Safety Data Sheet for safe handling details. Apply using a plastic weed sprayer or similar equipment. Rinse any metal parts with fresh water when finished.



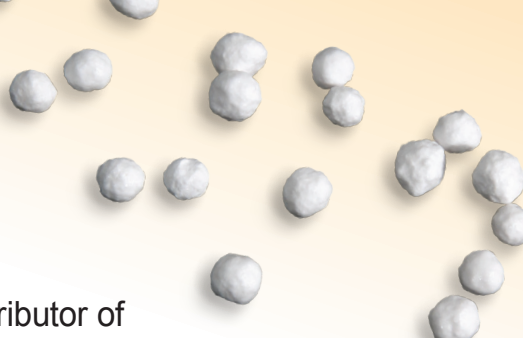

For more information or to find an authorized distributor of
OxyChem's calcium chloride products, please call or visit our website.

(888) 293-2336

www.oxycalciumchloride.com

Important: The information presented herein, while not guaranteed, was prepared by technical personnel and is true and accurate to the best of our knowledge. **NO WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTY OR GUARANTY OF ANY OTHER KIND, EXPRESS OR IMPLIED, IS MADE REGARDING PERFORMANCE, SAFETY, SUITABILITY, STABILITY OR OTHERWISE.** This information is not intended to be all-inclusive as to the manner and conditions of use, handling, storage, disposal and other factors that may involve other or additional legal, environmental, safety or performance considerations, and OxyChem assumes no liability whatsoever for the use of or reliance upon this information. While our technical personnel will be happy to respond to questions, safe handling and use of the product remains the responsibility of the customer. No suggestions for use are intended as, and nothing herein shall be construed as, a recommendation to infringe any existing patents or to violate any Federal, State, local or foreign laws.



Occidental Chemical Corporation

A subsidiary of Occidental Petroleum Corporation